



K-10-SP

PORTABLE THERMAL FOGGER

AN ALLROUND TALENT FOR LIGHTWEIGHT USAGE

Empty weight	7 kg
Size (length x breadth x height)	106 x 29 x 33 cm
Capacity of solution tank	5 litres
Capacity of fuel tank	2 litres
Cubic capacity of engine	300 cm ³
Max. performance of engine	17,5 kW (24,1 hp, 15.300 kcal/h)
Max. fuel consumption	1,9 l/h
Automatic ignition	Electronic ignition coil fed by 4 x dry batteries = 6V
Starting device	Quick start (Push Button)
Flow rate	10 - 35 l/h (according to nozzle size used)
Standard flow rate	12 l/h
Droplet size spectrum (depending on oil viscosity and nozzle size used)	< 25 µm (oil) < 60 µm (oil/water) < 150 µm (water)


FOGGING TECHNIQUE AND APPLICATION

Thermal fogging is the generation of ultra-fine droplets in a range of 1-50 µm using thermo-pneumatic energy. Liquid substances are vaporized in the unit and form ultra-fine aerosols by condensing on contact with cool ambient air. Thermal fogging is used for any pest control task where active substances should be uniformly distributed even in inaccessible places, without leaving undesirable residues.


The fogging technique is the solution for treating large areas and spaces with a minimum quantity of pesticide solution, less operational work and with little harm to the environment (less residues, no penetration into the ground), e.g. in the field of public health, stock protection, plant protection, disinfection, decontamination, deodorization and cinema effects. The K 10-SP is registered at WHO (World Health Organization).

K-10-SP FEATURES

- pulse-jet engine without movable parts allows unlimited operation.
- 5 litres solution tank, easily detachable, made of heavy duty polyethylene, transparent with litre scale.
- Double stainless steel-cooling jacket/diffuser with front cooling air intake, additional sound absorption and effective heat control.
- pulsFOG fingertip quick-start-system through patented direct fuel injection and automatic ignition.
- For safety-reasons: non-pressurized fuel tank.
- Most metal parts made of stainless steel.
- Manual fog control valve combined with automatic cut-off device (optional).
- Simple and straightforward design enables the user to carry out repair work himself.

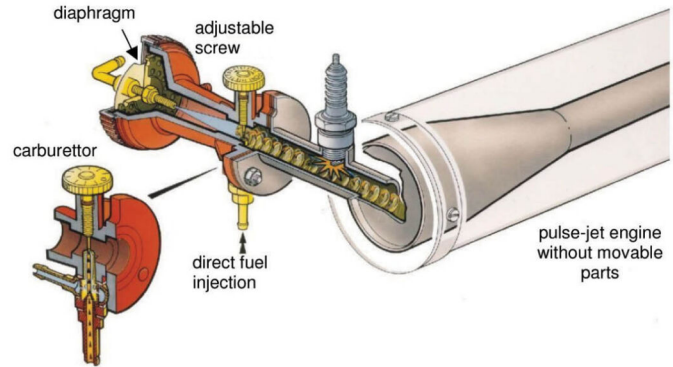

AUTOMATIC CUT-OFF DEVICE (OPTIONAL) :

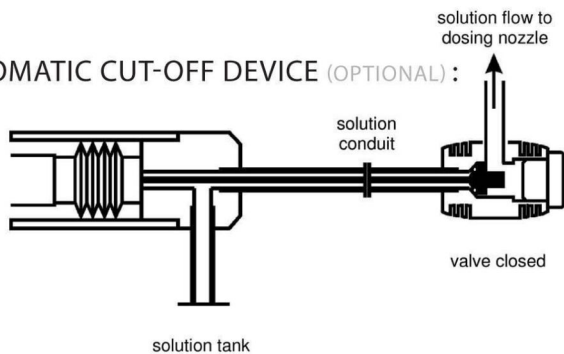

Finger-tip-start by a simple finger press

- Open adjustable screw on carburettor.
- Push down the primer for immediate fuel injection and engine start.

Standard accessories:

Fuel pitcher, solution funnel, spare parts bag with membranes and sealing rings, cleaning brush and ear protectors

Optional accessories:

Air agitator, automatic cut-off device, additional protection grating, dosing nozzles of different sizes, protective suit, respiratory mask with filter A₂ B₂-P₃



a)



b)

